



ZA-0.1218A



ZA-0.1218B



1.this completely plastic cover can help the motor to reduce heat, and it can protect the motor not damaged easily.
2.the metal air filter is more better quality,more better to reduce the noise.



ZA-0.1218C



this check hole can assemble the ball valve,if need more bigger outlet air,you can use this hole.

this decoration belt can make the compressors looks more beautiful.

型号 MODEL ZA-0.1218A

功率 POWER(KW/HP)	0.75/1
气缸 CYLINDER (MM/PIECE)	Φ42 × 1 (Φ47 × 1)
转速 SPEED (R.P.M)	2800
额定压力 PRESSURE(BAR/PSI)	8/115
排气量 CAPACITY(L/MIN/C.F.M)	120/4
储气量 TANK (L/GAL)	8/2.1
重量 N.T (KG)	17
外型尺寸 MENSION(L × W × H)(mm)	495 × 230 × 470

型号 MODEL ZA-0.1218B

功率 POWER(KW/HP)	1.5/2 (1.8/2.5)
气缸 CYLINDER (MM/PIECE)	Φ42 × 1 (Φ47 × 1)
转速 SPEED (R.P.M)	2800
额定压力 PRESSURE(BAR/PSI)	8/115
排气量 CAPACITY(L/MIN/C.F.M)	120/4
储气量 TANK (L/GAL)	25/6 (50/13)
重量 N.T (KG)	24 (28)
外型尺寸 MENSION(L × W × H)(mm)	540 × 240 × 590 (700 × 310 × 690)

型号 MODEL ZA-0.1218C

功率 POWER(KW/HP)	1.5/2 (1.8/2.5)
气缸 CYLINDER (MM/PIECE)	Φ42 × 1 (Φ47 × 1)
转速 SPEED (R.P.M)	2800
额定压力 PRESSURE(BAR/PSI)	8/115
排气量 CAPACITY(L/MIN/C.F.M)	120/4
储气量 TANK (L/GAL)	25/6 (50/13)
重量 N.T (KG)	24 (28)
外型尺寸 MENSION(L × W × H)(mm)	540 × 240 × 590 (700 × 310 × 690)

Any other colors to choose from:



Any other colors to choose from:





V-0.1718A



V-0.1718B



V-0.2518B

this air regulator is use to separate the oil from the air,make the air more cleanly.



V-0.2518A



V-0.2518C



V-0.618 V-0.6718

型号 MODEL	V-0.1718A	V-0.1718B	V-0.2518A
功率 POWER(KW/HP)	2.2/3	1.5/2	2.2/3.0
气缸 CYLINDER (MM/PIECE)	Φ51×2	Φ51×2	Φ65×2
转速 SPEED (R.P.M)	950	1050	950
额定压力 PRESSURE(BAR/PSI)	8/115	8/115	8/115
排气量 CAPACITY(L/MIN/C.F.M)	250/8	170/6	250/8
储气量 TANK (L/GAL)	100/26	100/26	150/39
重量 N.T.(KG)	71	71	85
外型尺寸 MENSION(L×W×H)(mm)	1090×390×760	670×430×1150	1370×450×830

Any other colors to choose from:



型号 MODEL	V-0.2518B	V-0.2518C	V-0.618	V-0.6718
功率 POWER(KW/HP)	2.2/3	2.2/3	4/3	5.5/4
气缸 CYLINDER (MM/PIECE)	Φ65×2	Φ65×2	Φ80×2	Φ90×2
转速 SPEED (R.P.M)	950	950	960	960
额定压力 PRESSURE(BAR/PSI)	8/115	8/115	8/115	8/115
排气量 CAPACITY(L/MIN/C.F.M)	250/8	250/8	600/21.1	670/23.7
储气量 TANK (L/GAL)	100/26	100/26 (150/39) (200/52)	200/52	300/78
重量 N.T.(KG)	71	71 (85) (100)	110	170
外型尺寸 MENSION(L×W×H)(mm)	1090×380×760	1090×380×760 (1370×450×830) (1560×470×880)	1560×490×960	1660×580×1050

Any other colors to choose from:



AIR COMPRESSORS PUMPS



stream air compressors pumps in product reliability and durability with a unique, with a low coefficient of friction and high abrasion resistance, dynamic balance ductile iron tree, oil pan, cylinder is more durable castiron, in order to better heat dissipation, aluminum head valve flap stainless steel high strength, wear-resistant special treatment, connecting rods, control at all stages of production and testing of inhalation of the unique features of all the works.



MY1051 MY1065



MY2051 MY2051A



MY2065



MY2080 MY2090



MY3080 MY3090



MY3090A



MY2065Q



MY3065Q



MY3065

QUALITY FROM PROFESSIONAL
CE GS ISO9001:2000

型号 MODEL

MY2065Q	MY3065Q	MY3065
功率 POWER(KW/HP)	4/5.5	5/6.5
气缸 CYLINDER (MM/PIECE)	Φ65×2	Φ65×3
转速 SPEED (R.P.M)	950	1080
额定压力 PRESSURE(BAR/PSI)	8/115	8/115
排气量 CAPACITY(L/MIN/C.F.M)	25/08	36/012.7
重量 N.T.(KG)	17	24
外型尺寸 MENSION(L×W×H)(mm)	370×280×340	440×280×350

型号 MODEL

MY2080 (MY2090)	MY3080 (MY3090)	MY3090A
功率 POWER(KW/HP)	4/5.5 (6.5/7.5)	7.5/10
气缸 CYLINDER (MM/PIECE)	Φ80×2 (Φ90×2)	Φ80×3 (Φ90×3)
转速 SPEED (R.P.M)	880 (960)	1060 (950)
额定压力 PRESSURE(BAR/PSI)	8/115	8/115
排气量 CAPACITY(L/MIN/C.F.M)	60/21.1 (67/23.7)	90/31.8 (100/35.3)
重量 N.T.(KG)	36 (42)	45 (66)
外型尺寸 MENSION(L×W×H)(mm)	480×300×440 (500×320×460)	530×340×460 (590×350×460)

型号 MODEL

MY1051 (MY1065)	MY2051 (MY2051A)	MY2065
功率 POWER(KW/HP)	0.75/1 (1.1/1.5)	2.2/3
气缸 CYLINDER (MM/PIECE)	Φ51×1 (Φ65×1)	Φ65×2
转速 SPEED (R.P.M)	1400	950
额定压力 PRESSURE(BAR/PSI)	8/115	8/115
排气量 CAPACITY(L/MIN/C.F.M)	36/1.3 (69/2.8)	120/4 (170/6)
重量 N.T.(KG)	10 (14)	16 (17)
外型尺寸 MENSION(L×W×H)(mm)	230×210×260 (260×340×350)	370×280×340



QUALITY FROM PROFESSIONAL
CE GS ISO9001:2000



MY3100



MY3120



MY1105



BM003



BM001



MY2055(AL)

型号 MODEL	MY3100	MY3120	MY1105
功率 POWER(KW/HP)	11/15	15/20	4/5.5
气缸 CYLINDER (MM/PIECE)	Φ100×3	Φ120×3	Φ55×1 (Φ105×1)
转速 SPEED (R.P.M)	790	820	860
额定压力 PRESSURE(BAR/PSI)	8/115	8/115	12.5/178
排气量 CAPACITY(L/MIN/C.F.M)	1600/57.1	2600/92.8	630/22.5
重量 N.T.(KG)	113	171	80
外型尺寸 MENSION(L×W×H)(mm)	680×440×580	790×550×720	440×430×500



MY2105



MY1155T



MY2155T

型号 MODEL	BM001	BM003	MY2055(AL)
功率 POWER(KW/HP)	1.5/2	1.5/2	1.5/2
气缸 CYLINDER (MM/PIECE)	Φ47×1	Φ47×1	Φ55×2
转速 SPEED (R.P.M)	4800	4800	1050
额定压力 PRESSURE(BAR/PSI)	8/115	8/115	8/115
排气量 CAPACITY(L/MIN/C.F.M)	120/4	120/4	200/7.1
重量 N.T.(KG)	12	12	13
外型尺寸 MENSION(L×W×H)(mm)	320×270×350	320×270×350	290×270×340



MY2065(AL)



MY2070(AL)



MY2080(AL)/MY2090(AL)

型号 MODEL	MY2105	MY1155T	MY2155T
功率 POWER(KW/HP)	7.5/10	11/15	22/30
气缸 CYLINDER (MM/PIECE)	Φ55×2 (Φ105×2)	Φ55×1 (Φ82×1)	Φ55×2 (Φ82×2)
转速 SPEED (R.P.M)	780	720	720
额定压力 PRESSURE(BAR/PSI)	12.5/178	12.5/178	10/145
排气量 CAPACITY(L/MIN/C.F.M)	1050/37.5	1600/74.5	3000/96
重量 N.T.(KG)	132	110	350
外型尺寸 MENSION(L×W×H)(mm)	730×450×560	870×630×740	1070×690×740

型号 MODEL	MY2065(AL)	MY2070(AL)	MY2080(AL) MY2090(AL)
功率 POWER(KW/HP)	2.2/3	3/4	4/5.5 (5.5/7.5)
气缸 CYLINDER (MM/PIECE)	Φ65×2	Φ70×2	Φ80×2 (Φ90×2)
转速 SPEED (R.P.M)	950	1080	950
额定压力 PRESSURE(BAR/PSI)	8/115	8/115	8/115
排气量 CAPACITY(L/MIN/C.F.M)	250/8	300/10.6	400/14 (500/17.6)
重量 N.T.(KG)	18	15	32/36
外型尺寸 MENSION(L×W×H)(mm)	370×280×340	320×270×350	480×320×460



BV1/2A

BV1/2B

BV1/4B

BV1/4C

BV1/4

BV1/8

BV1/4A

BV1/2

球阀(Ball Valve)

QUALITY FROM PROFESSIONAL
CE GS ISO9001:2000



Φ100

Φ120

Φ120

Φ90

Φ65

Φ80

Φ51

Φ42

Φ47

活塞销(Piston Pin)

活塞(Piston)

压力表(Pressure Gauge)



PGΦ50A

PGΦ50B

PGΦ40B

PGΦ60

PGΦ100

调压阀(Regulator Tap)



RT01

RT02

RT03

安全阀(Safety Valve)



SV1/2

SV3/8

SV3/8

SV1/2

SV3/8

SV3/8

SV1/4

SV1/2

RT08

RT09


RT10

RT11

纸垫(Gasket)



连杆 (Piston Rod)

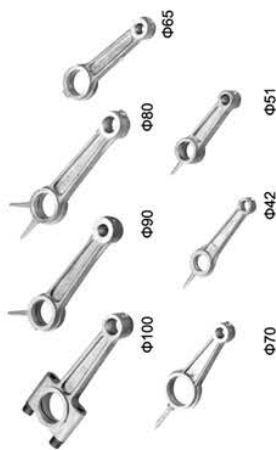


Φ70

Φ42

Φ51

Φ65

活塞环 (Piston Ring)

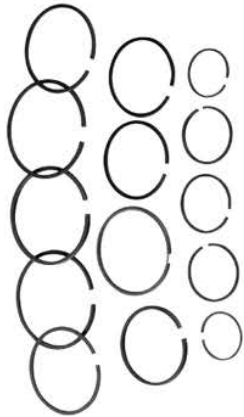

阀片 (Valve Plank)



油封 (Oil Seal For Head)





轴承(Bearing)



曲轴(Crank Shaft)



快接(Quick Coupler)



排污阀(Drain Valve)



铜管(Pipe)



单向阀(Single Valve)



弯头(Elbow)



油标(Oil Indicator)



油塞(Oil Seal)



消音器(Air Filter)